




Arezzo

Housing : Extruded aluminum anodized grey
 Light Window: Tempered glass
 Input : DC24V
 LED : OSRAM SMD3030
 LED Driver : DC24V constant voltage remote LED driver excluded
 Power Cable : 2X0.75mm² L=0.15m rubber cable (Low voltage)
 Life Time : ≥80000 hours



CBL1811


Low voltage input (DC24V) plug type

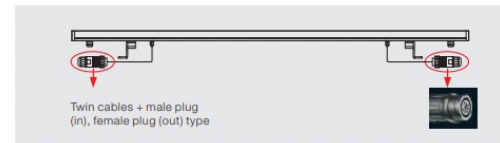

CBL1811
LED Wall Washer with Baffle

Specifications

Model	Wattage	Lumen	Length	A	B	Line Art
CBL1811	3W	240lm	300mm	35mm	64mm	
	6W	480lm	500mm			
	12W	960lm	1000mm			
CBL1811-RGBW	5W	/	300mm	35mm	64mm	
	10W	/	500mm			
	20W	/	1000mm			

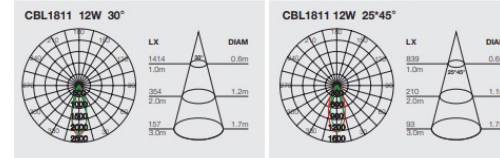

Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.

ORDERING INFORMATION:

Example: CBL1811-03-827-25D-LV-BA

Model	Length	CRI & CCT	Beam	Input Voltage	Accessories
CBL1811	03	827	25D	LV	BA
CBL1811	03	827	25°	Low Voltage (DC24V)	Baffle
	05	840	30D		
	10	857	D1		
		RGBW	RGBW		

The accessories should be specified separately




CBL1803

Arezzo

Housing : Extruded aluminum anodized grey
 Light Window: Tempered glass
 Input : DC24V
 LED : OSRAM SMD3030
 LED Driver : DC24V constant voltage remote LED driver excluded
 Power Cable : 2X0.75mm² L=0.15m rubber cable (Low voltage)
 Life Time : ≥80000 hours





Low voltage input (DC24V) plug type

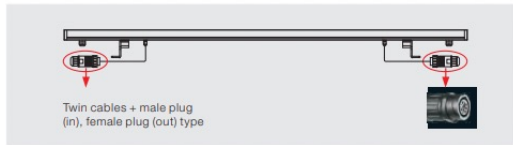

Specifications

Model	Wattage	Lumen	Length	A	B	Line Art
CBL1803	9W	720lm	300mm	43mm	69mm	
	18W	1440lm	500mm			
	36W	2880lm	1000mm			
CBL1803-RGBW	9W	/	300mm	43mm	69mm	
	18W	/	500mm			
	24W	/	1000mm			
	36W	/				

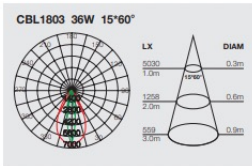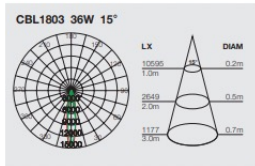

Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.

ORDERING INFORMATION:

Example: CBL1803-03-827-15D-LV-BA

Model	Length	CRI & CCT	Beam	Input Voltage	Accessories
CBL1803	03	827	15D	LV	BA
CBL1803	03	827 Ra ≥ 80 2700K	15D 15°	LV Low Voltage (DC24V)	BA Baffle
	05	840 Ra ≥ 80 4000K	30D 30°		
	10A	857 Ra ≥ 80 5700K	45D 45°		
	10B	RGBW	D1 20°40°		
			D2 15°60°		

The accessories should be specified separately




CBL1802

Arezzo

Housing : Extruded aluminum anodized grey
 Light Window: Tempered glass
 Input : DC24V
 LED : OSRAM SMD3030
 LED Driver : DC24V constant voltage remote LED driver excluded
 Power Cable : 2X0.75mm² L=0.15m rubber cable (Low voltage)
 Life Time : ≥80000 hours






Low voltage input (DC24V) plug type

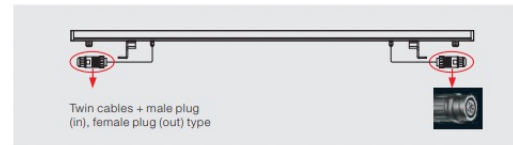

Specifications

Model	Wattage	Lumen	Length	A	B	Line Art
CBL1802	6W	480lm	300mm	35mm	64mm	
	12W	960lm	500mm			
	24W	1920lm	1000mm			

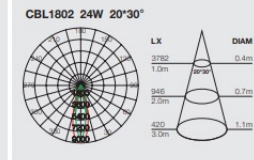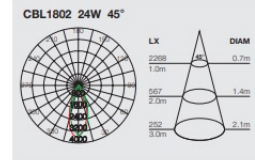

Application

- Highlighting of high-rise structural details.
- Retail window and showroom backgrounds.
- Indoor/outdoor sculptures.

ORDERING INFORMATION:

Example: CBL1802-03-827-45D-LV-BA

Model	Length	CRI & CCT	Beam	Input Voltage	Accessories
CBL1802	03	827	45D	LV	BA
CBL1802	03	827 Ra ≥ 80 2700K	45D 45°	LV Low Voltage (DC24V)	BA Baffle
	05	830 Ra ≥ 80 3000K	1D 20°30°		
	10	857 Ra ≥ 80 5700K			

The accessories should be specified separately