

Overview



White




Black

(Darklight technology)




Silver


Dimensions

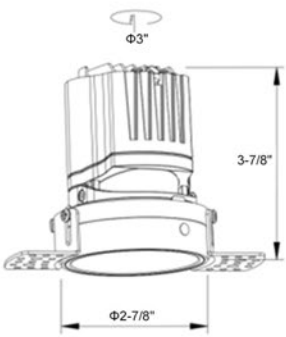


Trimless 8-12 W

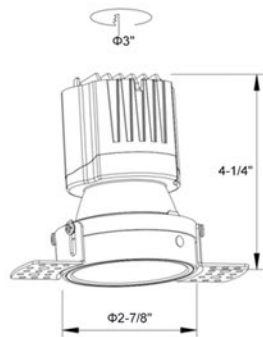


Deep Trimless 8-12 W

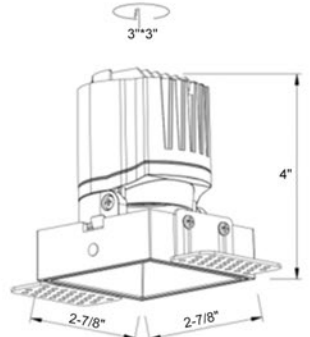


Trimless Square 8-12 W

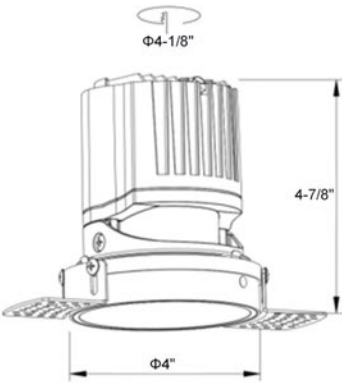

Trimless 15-20 W

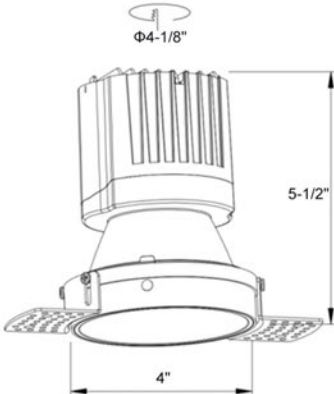


Deep Trimless 15-20 W

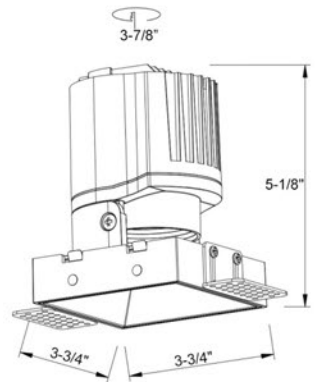


Trimless Square 15-20 W


Light Distribution

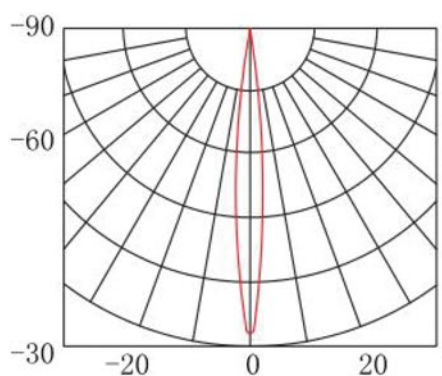

15°

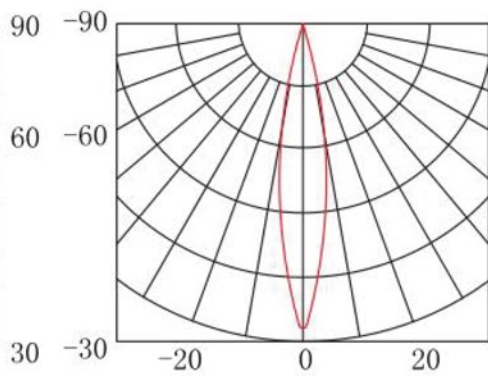


24°

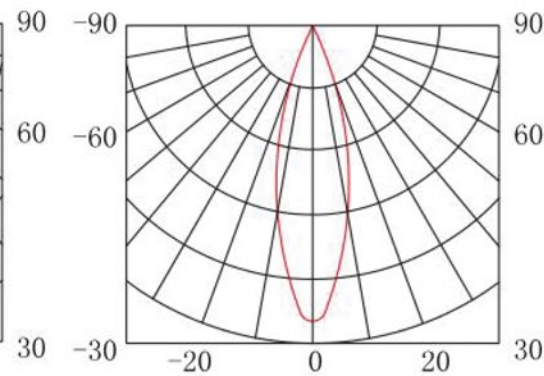

38°

Accessories



Anti-glare accessory available, honeycomb and opal plate options, UGR<13.

Brackets with different cut-out sizes and shapes are available in stock with extra cost.



OSRAM

LUMINUS

PHILIPS



Standard products are CRI90+, which can be upgraded to CIR95+ upon request.

Order Code Table

Example: PM-Peak-3S-2700-15-0-90-B-B

Series	Size	Colour Temp.	Beam Angle	Optics	CRI	Reflector Colour	Frame Colour
PM-Peak	3R: 2 7/8" Round	2700	15	O: Opal	90	W: White	W: White
	3RD: 2 7/8" Round Deep	3000	24	H: Honeycomb	95	B: Black	B: Black
	4R: 4" Round	3500	38			S: Silver	
	4RD: 4" Round Deep	4000					
	3S: 2 7/8" Square						
	4S: 3 3/4" Square						

